

1C - Technical specifications

Receiver type:	Superheterodyne.
Demodulation:	FM/FSK.
Operating frequency:	868,30 MHz.
Local oscillator frequency:	13,995 MHz.
Intermediate frequency:	10,7 MHz.
Sensitivity (for good signal):	-115 dBm.
Input impedance:	50 Ohm.
Supply voltage :	12 or 24 V ac/dc.
Current consumption:	at rest: 25 mA with relay excited: 55 mA
Number of relays:	2 (1NO, 1NO or NC).
Commutable max power:	24W or 24VA .
Max codes number:	85.
Operating temperature:	from -20 to + 70 °C.
Dimensions (Fig. 1):	105 x 45 x 28 mm.
Weight:	65 gr.

1D - Main features

- Memory for 85 transmitter keys;
- Self-learning and erasing of the transmitter code simply using the transmitter keys, without accessing to the receiver board;
- Display of the transmitter key number;
- Display of the memory position for the last memorized transmitter;
- Overwrite of a transmitter code;
- Programmable operation of the relays: pulsing, latching and timed;
- Programmable delay of release for the relays from 1 sec. to 10 hours;
- Full memory cancellation.

1E - Receiver detail (Fig. 2)

LR: Red led LV: Green led
PR: Red push-button PV: Green button
RR: Red relay RV: Green relay

Power-supply : terminals 1 , 2 : 12 Vac/dc Antenna : terminal 9 : shield
terminals 1 , 3 : 24 Vac/dc terminal 10 : core. (RG 58)

Relay Outputs: terminals 4,5 : NO contact (red relay)
terminals 6,7: NO contact green relay
terminals 6,8: NC contact green relay

2A - Transmitter memorizing

The code of each transmitter key can be memorized into the receiver in 2 different ways:

- A- Directly on the receiver, by using the receiver push-buttons PR or PV.
B- Far from the receiver, by using the transmitter keys.

A) Direct memorization - To program a transmitter at the receiver

- Select the relay to be programmed Green (PV) or Red (PR)
- Push desired relay key for 2 seconds or until LED comes on
- Within 2 seconds press desired transmitter key to store in receiver memory.

LED light should blink and relay should cycle.

B) Remote programming mode : To program transmitters thru the use of a transmitter

Note: To utilize this mode the receiver must first have at least one transmitter programmed into the receiver.

- Programming request - Push both keys of the transmitter that is already stored in the receiver until the receiver "beeps";
- Programming entry - Release both keys and immediately press A or B key to select the corresponding relay to be programmed and hold key for 4 seconds;

The LED light of corresponding relay will turn on and "beep" will be continuous;

- Memorization - Within 2 seconds press new transmitter button to be memorized.

Example: Memorization of a second transmitter (TX2) with key A on relay red RR and key B on relay green RV into a receiver with a transmitter (TX1) already stored:

Push keys A+B of TX1(bip); Push the key A of TX1 for 4 sec.(Biiiiiiip); push the key A of TX2 within 2 sec.

Push keys A+B of TX1(bip); Push the key B of TX1 for 4 sec.(Bip, Bip, ...Bip); push the key B of TX2 within 2 sec.

NOTE : The memory capacity is of 85 transmitter keys. That means that a 4 keys transmitter needs 4 memory positions. It is possible to display the memory position by following the procedure 2B.

A transmitter key can be memorized on each relay RR or RV but not on both.

2B - Display of the transmitter memory position

By following the present procedure it is possible to display the position occupied by a given transmitter key.

- Push the transmitter key for which it is necessary to know the memory position and verify the activation of the relay and the led.

- Push the button PR of the receiver for 1 second.

At this point begins a sequence of 7 total blinks of the two led lights LR and LV: by taking a note of what color light blinks, it is possible to obtain the memory position, according to the table 4:

Led blinks	1°	2°	3°	4°	5°	6°	7°
Green LED	1	2	4	8	16	32	64
Red LED	0	0	0	0	0	0	0

Tab. 4

Example: Transmitter blinks the following seven times after pushing the red relay (PR) key:

RED - RED - GREEN - GREEN - RED - RED - RED

This corresponds to the 12th position.

2C - Overwrite of an already stored Transmitter code

- Determine transmitter key memory position (see section 2B)
- Press corresponding relay programming key on transmitter for 4 seconds.
- Within 2 seconds press (PV)
- Within 2 seconds enter the transmitter memory position of existing transmitter by using (PR red) and (PV green) accordingly. There must be a total combination of seven button pushed (PV or PR) to match the memory position of existing transmitter.
- Within 1 second press the new transmitter key to be programmed.

The previous transmitter key will be removed and replaced by the key pressed in step 5.

3A - Memory capacity display

This procedure allows to display the number of occupied memory positions.

- Push the button PV of the receiver for 1 second.

At this point the receiver begins a sequence of 7 lightings of the leds LR and LV.

Referring to that it is possible to obtain the number of the occupied memory positions, according to tab.4.

3B - Memory full

When the receiver memory is full and a memorization procedure is started, both the leds LV and LR blink 3 times.

3C - Full memory erase

This operation is possible both with the transmitter keys (1) and with the receiver push buttons (2).

- Keep on pushed simultaneously the keys A and B of a TX whose codes are presents in the memory of the RX; the buzzer emits a bip and the leds turns on for a while; within 2 sec. keep on pushed the key A of the same TX for 4 sec.: the led LR is turned on and the buzzer sounds a long bip ("biiiiiiip").
- Within 4 sec.(before the end of the long bip) push again simultaneously A and B for other 4 sec.; at this point will occur 3 blinks of LR and LV and 3 long bips of the buzzer ("biiiiip - biiii - biiiiip").

At the end of this operation all the codes TX present in the memory are erased.

- Keep on pushed PR of the receiver until the red led LR is turned on.

Afterwards, keep on pushed simultaneously PV and PR for 4 sec. The receiver will give the operation confirmation with 3 blinks of the leds and 3 long bips of the buzzer ("Biiiiip - Biiii - Biiiiip").

4A - Relay configuration display

Keep on pushed PR (or PV) of the receiver for 4 sec. The configuration of the relay is displayed by the corresponding led according the following table:

Relay operating mode (RR or RV)	Led light type (LR or LV)
Pulse relay	Continuous light
Latching relay	Slow blinking
Timed relay	Fast blinking

Tab. 5

4B - Relay programming

The receivers are factory set to Pulse mode. To change the mode follow these steps (Fig. 4) :

- Press desired relay button on receiver to be programmed (PV or PR) for 4 seconds. LED will illuminate displaying relay status. Use Table 5 to determine the status.
- Within 1 second press PR to change the relay mode.

The relay mode will change according the diagram of fig. 4.

	Red relay RR	Green relay RV
Not allowed configurations	timed	latching
	timed	timed (with different delay times)

Tab. 6

4C - Relay RR (RV) configuration - Fig. 4

The operating mode of the relay is cyclic, with the possibility to change the mode according the following rules:

- If the relay is set as pulse: it becomes latching and after timed;
- If the relay is set as latching: it becomes pulse;
- If the relay is set as timed: it becomes pulse.

4E - Relay RR (RV) timing settings - Fig. 5

The modification for the relay settings, with the timing, can be done only if the relay has been set as impulsive.

Push the button PR (PV) of the receiver for 4 sec.; the led LR (LV) will turn on and will display the operating mode set for the relay RR (RV). If the led blinks slow or fast push PR for 1 second and the relay will be set as pulse. Then push again PR for 1 second and verify that the led LR (LV) switches off. Afterwards, within 2 seconds, begin to insert the selected relay time, by pushing on the buttons PR and PV according to the Table 12 and considering that PR has weight of "0" while PV has weight "1".

NOTE: The last pressures on PR of the sequence are not necessary.

Example 1: 8 sec. delay : input the sequence : PR - PR - PR - PV - PR - PR - PR.

Example 2: 2 min delay.: Input the sequence : PV - PR - PR - PR - PR - PR - PV - PV.

GUARANTEE

The guarantee period of the product is 24 months, beginning from the manufacturer date. During this period, if the product does not work correctly, due to a defective component, the product will be repaired or substituted at the discretion of the producer. The guarantee does not cover the plastic container integrity. After-sale service is supplied at the producer's factory.

DEUTSCH

1 - Allgemein

Der Empfänger SEL 2681 F868-IP (Abb. 1) ist eine Komponente unseres Funksystems 868, um Automationen und elektrische sowie elektronische Systeme fern zu steuern. Dank der hochsicheren Codierung, (KeeLoq® Hopping code) können wir einen manipulationssicheren Betrieb gewährleisten. Der vom Handsender gesendete Code ändert sich bei jeder Aktivierung und der Mikrocontroller im Empfänger synchronisiert alle eingelesenen Sender im System. Die Programmierung erfolgt selbstdlernd durch 2 Tasten.

Die Empfänger entspricht den europäischen Normen 73/23/CEE, 89/336/CEE, EN 60065.

2 - Handsender

- Erone 028F Mod. S2TR 2681 F2/F4/F2M: Handsender 2,4 Tasten, 2 Tasten Master;

3 - Technische daten

Empfängertyp:	Superheterodyne
Modulation:	FM/FSK
Frequenz:	868,30 MHz
Frequenz des lokalen Oszillators:	13,995 MHz
Zwischenfrequenz:	10,7 MHz
Empfindlichkeit(für erfolgreiches Signal):	-115 dBm
Eingangsimpedanz:	50 Ohm
Spannungsversorgung:	12/24 VAC/DC
Ruhestrom:	25 mA
Laststrom:	55 mA
Relaisanzahl:	2 (1NO / 1NO-NC)
Leistung	24 W
Betriebstemperatur	- 20 °C bis + 70 °C
Abmessung (Abb. 1):	105 x 45 x 28 mm

4 - Funktionen

- Funkfernprogrammierung über Handsender (Einlernen und Löschen der Codes);
- 85 Codes speicherbar;
- Anzeige der gespeicherten Codes;
- Anzeige der Speicherposition des letzten empfangenen Codes;
- Überschreiben von gespeicherten Codes;
- Vollständige Löschung des Codespeichers am Empfänger oder über Handsender;
- Programmierbare Relais : monostabil, bistabil und Zeitverzögert.

5 - Zeichenerklärung

6 - Anschlüsse (Abb. 2)

LR: rote LED	Einspeisung:	Antenne: (RG58)
PR: rotes Taste	Klemme 1 und 2: 12 VAC/DC	Klemme 9: Schirmung
RR: rotes Relais	Klemme 1 und 3: 24 VAC/DC	Klemme10: Antenne
LV: grüne LED		
PV: grüne Taste		
RV: grünes Relais	Relaisausgang: Klemme 4 und 5 : Kontakt NO (rotes Relais) Klemme 6 und 7 : Kontakt NO (grünes Relais) Klemme 6 und 8 : Kontakt NC (grünes Relais)	

Para programar los relés en modo biestable o temporizado, ver los puntos 4C y 4D de este manual.

NOTA 1: La memorización del TX siguiente al primero, en un receptor ya programado, es permitida sólo haciendo empleo de un TX ya memorizado.

Ejemplo : Memorización de un segundo TX con botón A sobre el relé rojo y B sobre el relé verde.

Pulsar los botones A y B de TX1 (bip); Pulsar A de TX1 durante 4 seg. (Biiiiiiip); pulsar A de TX2 ante de 2 segundos.

Pulsar los botones A y B de TX1 (bip); Pulsar B de TX1 durante 4 seg. (Bip, Bip, ..Bip); Pulsar B del TX2 ante de 2 segundos.

NOTA 2 : La capacidad de memoria del receptor es de 85 botones transmisor. Esto significa que un transmisor con 4 botones ocupa 4 posiciones de memoria. De cada botón transmisor se puede visualizar la posición de memoria siguiendo el procedimiento explicado en el punto 2B. Un botón transmisor puede memorizarse indiferentemente en el relé rojo RR o en el relé verde RV pero no en ambos.

2B -Visualización de la posición de memoria de los transmisores

Mediante el siguiente procedimiento se puede visualizar la posición de memoria que tiene un determinado botón transmisor. Activar el botón transmisor del cual se quiere conocer la posición de memoria y verificar que se enciende el LED correspondiente y que se activa el relé. Pulsar el botón PR del receptor durante 2 segundos.

En este punto el receptor empieza una secuencia de 7 encendidos de los LEDs LR y LV: apuntando la secuencia se puede hallar la posición de memoria siguiendo la tabla siguiente.

Led encendido	1°	2°	3°	4°	5°	6°	7°
Peso color Verde	1	2	4	8	16	32	64
Peso color Rojo	0	0	0	0	0	0	0

Tab. 10

Ejemplo :

Secuencia de encendido LED : LR, LR, LV, LV, LR, LR, LR.

El numero obtenido será: 0 + 0 + 4 + 8 + 0 + 0 + 0 = 12

Por tanto, el transmisor se encuentra en la posición 12 de memoria.

2C - Sobreescritura de códigos transmisores ya presentes en la memoria

Pulsar PR o PV del receptor durante 4 segundos, el LED correspondiente se enciende, indicando el modo de funcionamiento del relé. Antes de 2 segundos pulsar PV durante 1 segundo y verificar que se apaga el LED. Antes de 2 segundos después de que se haya apagado el LED, empezar a introducir la secuencia que indica la posición de sobreescritura (ver tabla 10).

Al final de la secuencia verificar que se enciende el LED (verde o rojo según el relé activado por el código que se va a sobreescibir) y antes de 4 segundos pulsar el botón del nuevo transmisor que se quiere memorizar.

3A -Visualización del espacio de memoria

Pulsar el botón PV del receptor durante 1 segundo.

En este punto el receptor empieza la secuencia de 7 encendidos de los LEDs LR y LV: con la secuencia se puede averiguar el número de celdas de memoria ocupadas siguiendo la tabla 10.

3B - Memoria llena

Una vez finalizada la fase 2, si al pulsar el botón de un transmisor a memorizar parpadean simultáneamente los LEDs LR y LV, esto significa que no queda espacio de memoria libre.

3C - Borrado completo de la memoria

Esta operación es posible tanto con el telemando como con los botones del receptor.

Con el telemando: Efectuar un "Requerimiento de programación" (fase 1) y una "Entrada en programación" (fase 2) tal y como se describe en el punto 2A. Luego pulsar y mantener pulsados los botones A y B del transmisor durante 4 segundos. El receptor confirma el borrado total con 3 parpadeos de los 2 LEDs y 3 bips del buzzer.

Con los botones del receptor: Pulsar por 2 segundos el botón PR del RX, el led LR se enciende de luz continua; luego, dentro de 2 seg., pulsar y mantener pulsados los botones PR y PV durante 4 segundos. El receptor confirma el borrado total con 3 parpadeos de los 2 LEDs y 3 bips del buzzer.

4A - Visualización del estado de los relés

Pulsar y mantener pulsado el botón PR (o PV) del receptor durante 4 seg. La configuración del relé rojo RR (o verde RV) es enseñada por los encendidos de los led rojo o verde, según el siguiente tablero:

Mensaje visual LED (LR o LV)	Funcionamiento relé (RR o RV)
Luz continua	relé monoestable
Luz intermitente	relé biestable
luz intermitente rápida	relé temporizado

Tab. 11

4B - Programación de relés

El funcionamiento es cíclico, modificable en secuencia según las siguientes reglas:

- Si es: monoestable pasa a ser biestable y luego temporizado;
- Si es: biestable pasa a ser monoestable;
- Si es: temporizado pasa a ser monoestable.

El receptor se vende con el modo de funcionamiento establecido en monoestable.

Para modificarlo es necesario primero configurar los relés en modo biestable para luego cambiarlos a temporizados. Las predisposiciones referentes a los relés se pueden efectuar exclusivamente por medio de los botones PR y PV presentes en la tarjeta del receptor y no mediante el transmisor.

Limitaciones

1) no es posible tener los dos relés RR y RV temporizados con tiempos diferentes, pero el tiempo que asumen ambos es el último introducido;

2) en la configuración Biestable + Temporizado es obligatorio que el relé verde RV esté en modo biestable y que el relé rojo RR esté en modo temporizado.

4C - Cambio del funcionamiento del relé rojo RR (relé verde RV) (Fig. 4)

Pulsar el botón PR (PV) del receptor durante 4 segundos, el LED rojo LR (LED verde LV) se enciende e indica el modo de funcionamiento para el relé rojo RR (relé verde RV), como se describe en el punto 4A. Antes de 2 segundos pulsar el botón PR durante 1 segundo: el modo de funcionamiento se modifica según las reglas expuestas en el punto 4B.

4D - Temporización del relé rojo RR (relé verde RV) (Fig. 5)

La modificación del funcionamiento del relé, con la introducción de la temporización, puede efectuarse sólo si está configurado como monoestable. Pulsar el botón PR (PV) del receptor durante 4 segundos; el LED rojo LR (LED verde LV) se enciende e indica el modo de funcionamiento para el relé rojo RR (relé verde RV). Si el led es intermitente o intermitente rápida pulsar de nuevo PR durante 1 segundo para cambiarlo a monoestable. Luego pulsar PR durante 1 segundo y verificar que el LED LR (LV) se apaga. Luego, antes de 2 segundos introducir la secuencia de temporización con los botones PR y PV en base a la Tabla 12 teniendo en cuenta que PR tiene peso 0 y PV tiene peso 1:

Ejemplo 1 : secuencia para temporización de 8 seg : PR - PR - PR - PV - PR - PR - PR.

Ejemplo 2 : secuencia para temporización de 2 min: PV - PR - PR - PR - PR - PR - PV.

GARANTIA

La garantía es de 24 meses a partir de la fecha de fabricación indicada en el interior. Durante dicho periodo, si el aparato no funciona correctamente, a causa de un componente defectuoso, será reparado o sustituido a discreción del fabricante. La garantía no cubre la integridad de la caja de plástico. La garantía se presta en la sede del fabricante.

Pressioni tasti / Button act / Tastenbetätigung / Presión botones	1°	2°	3°	4°	5°	6°	7°
sec/sec./sek/seg.	1	2	4	8	16	R	R
sec/sec./sek/seg.	10	20	40	80	160	V	V
Min/min/min/min	2	4	8	16	32	R	V
Min/min/min/min	20	40	80	160	320	V	V

Tab 12

Dimensioni d'ingombro / Overall dimensions / Abmessung / Dimensiones

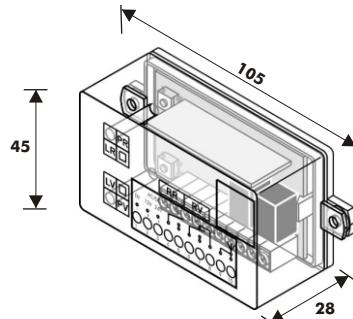


Fig. 1

Connessioni / Connections / Anschlüsse / Conexiones

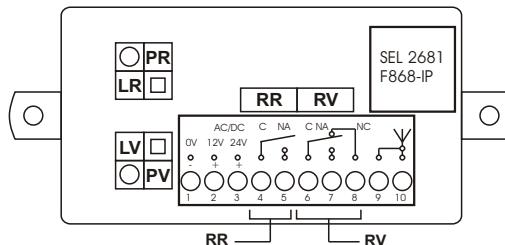


Fig. 2

LEGENDA

- | | | | |
|--|--|--|--|
| | Pressione di 4 sec. sul tasto;
Keep on button pressed for 4 sec.;
Taste für 4 Sek drücken;
Pulsar el botón durante 4 | | LED spento/off/aus/apagado |
| | Pressione di 1 sec. sul tasto;
Keep on button pressed for 1 sec.;
Taste für 1 Sek drücken;
Pulsar el botón durante 1 segundo. | | LED acceso/on/ein/encendido |
| | Rilasciare il tasto;
Release the button;
Taste loslassen;
Relajar el botón. | | LED lampeggio lento/slow
blinking
LED blinke /intermittente |
| | Rilasciare il tasto;
Release the button;
Taste loslassen;
Relajar el botón. | | LED lampeggio veloce/fast
blinking
LED blinke schnell / intermitente |

Fig. 3

Impostazione relè / Relay configuration / Programmierung des relais / Programación de relés

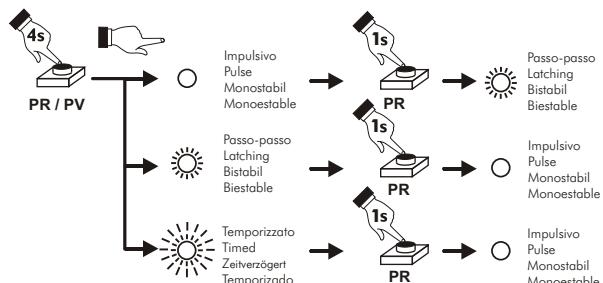


Fig. 4

Temporizzazione relè / Relay timing settings / Timerprogrammierung Relais / Temporización relé

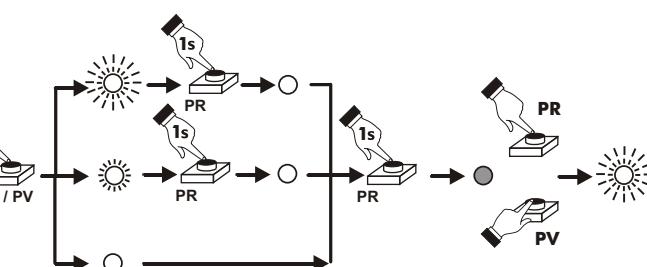


Fig. 5



Manufactured by
ELPRO INNOTEK S.p.A.
ITALY